




SITE LOCATION
NOT DRAWN TO SCALE

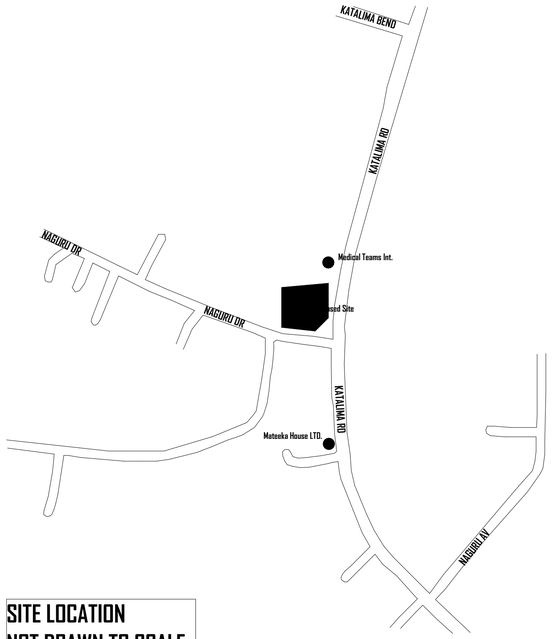


PLOT ARRANGEMENT
SCALE 1:1000

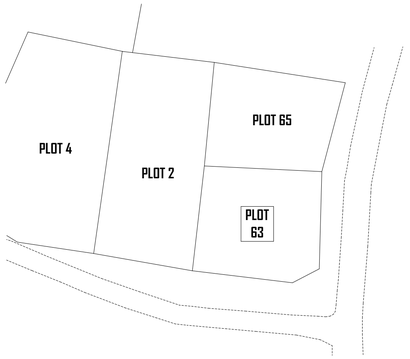

GOOGLE LOCATION
NOT TO SCALE

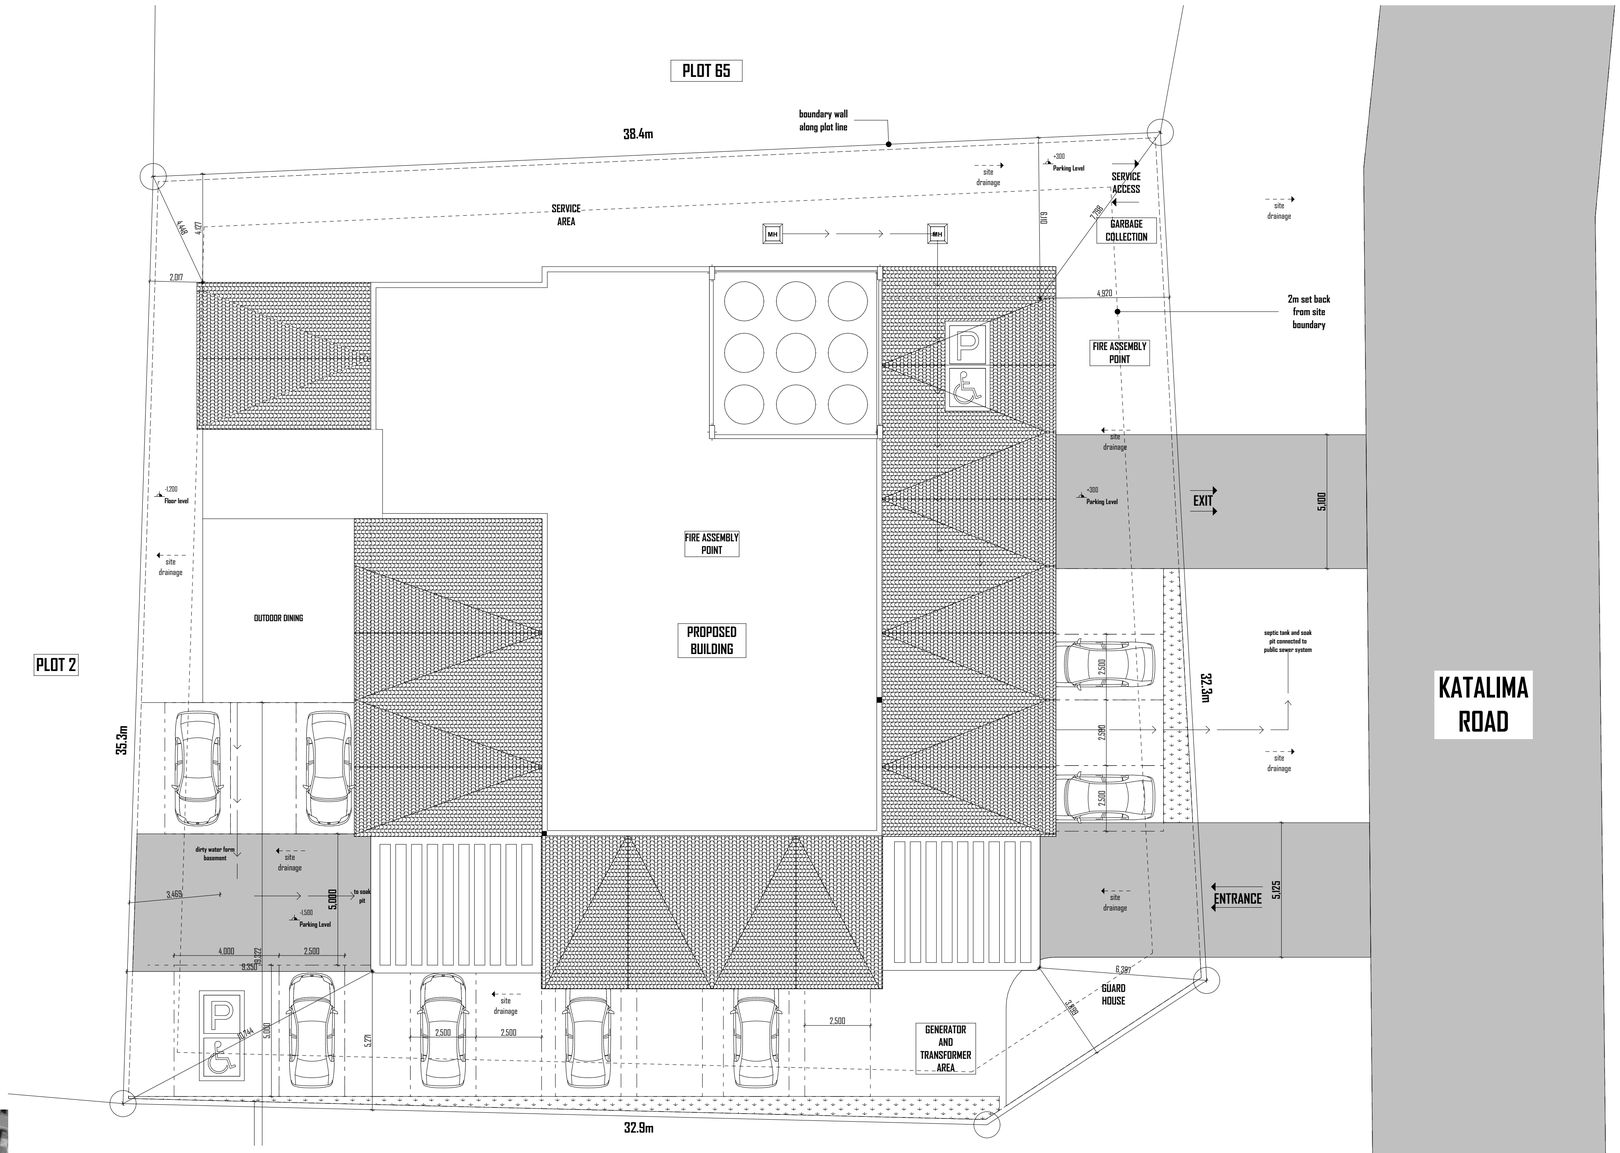

SITE PLAN
SITE AREA 1440m^2
BUILT UP AREA 722m^2
SCALE 1:125

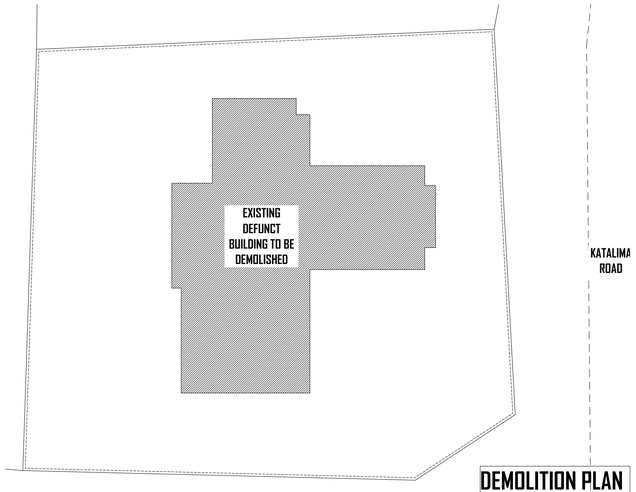

DEMOLITION PLAN
SCALE 1:250

N

NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.
2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.
3. All reinforced concrete work is to be in accordance with structural engineer's details.
4. All sanitary work to be in accordance with M.O.H rules and regulations.
5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.
6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.
7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.
8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.
9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.
10. All internal plaster to be two coats steel float finished.
11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.
12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.
13. All painting to be 3 coats.
14. Splash apron of 1000mm along the perimeter of building.
15. Samples of fittings, materials etc. to be produced & approved before commencing work.
16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.
17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.
18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.
19. These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications.
Any discrepancy shall be reported immediately to the Architect.
20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications.
Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project
PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage
Submission to Kampala Capital City Authority

Drawing Title
SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT


AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104

Structural Engineer



Mechanical and Electrical Engineer

Drawn By
BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA
KAMPALA[UG]
Mobile: +256 709515253



Date	Scale	Checked :
JAN: 2025	AS INDICATED	
Project No. P0	Drawing No. 01	Revision

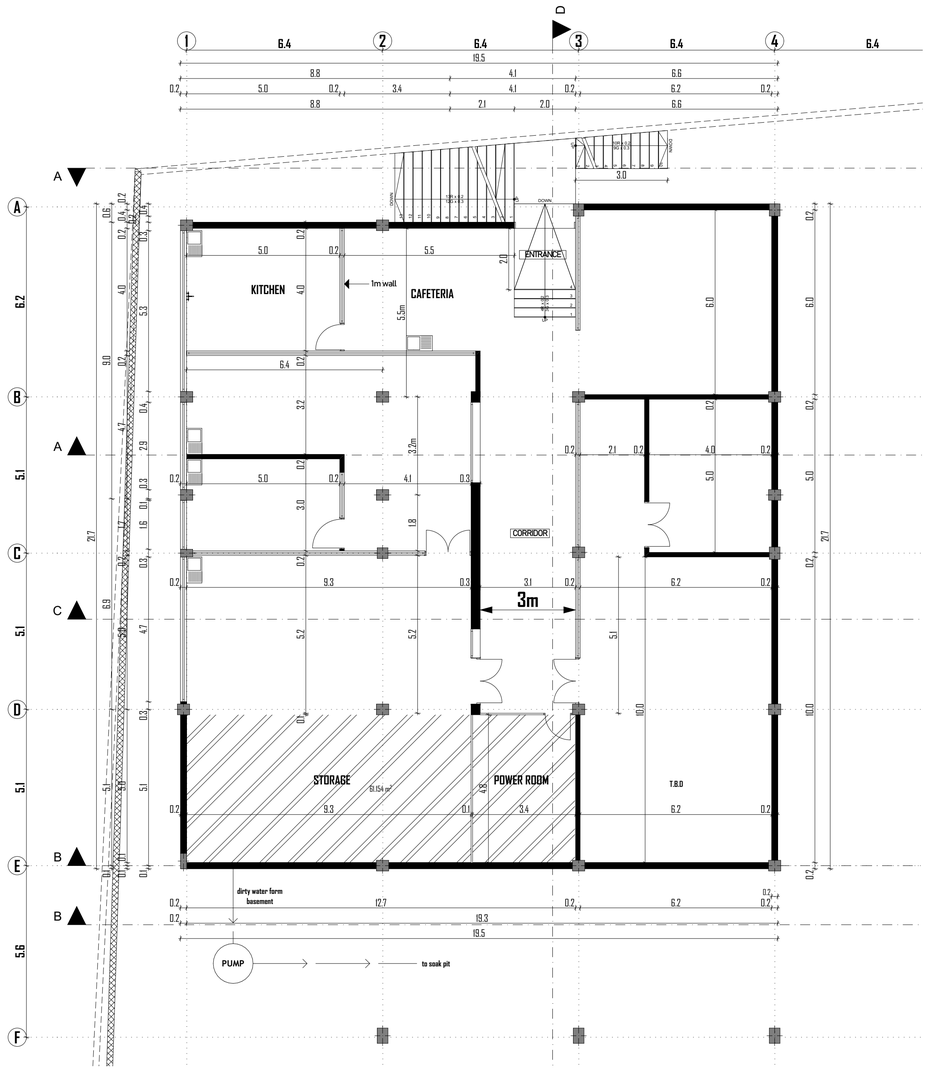

BASEMENT FLOOR
SLAB AREA 415m²
SCALE 1:100

MARK	ELEVATION	SIZE (WxH)	DESCRIPTION	COUNT
D1		2700x2400	50mm thick aluminium casement door in black coating, framed in clear tempered glass (8mm) with swinging shutters and side lights.	1
D2		900x2400	Wooden panelled door fixed on hinges with fixed glass transom finished with wood vanish	7
D3		800x2100	Wooden flush door fixed on hinges finished with wood vanish	11
D4		1500x2400	Metallic double shutter door fixed on hinges with tempered glass (8mm) panels and transom finished with black paint	2
D5		1500x2100	Wooden double shutter door fixed on hinges with tempered glass (8mm) panels and transom finished with black paint	2
D6		4400x3900	Folding partition door fixed on hinges with glass panels and tempered glass(8mm) transom window finished with black paint	8

DOOR SCHEDULE
SCALE 1:75

MARK	W1	W2	W3	W4	W5	W6
ELEVATION						
SIZE (WxH)	1800x2000	4600x2400	3250x2200	6000x1000	4000x1000	3000x800
DESCRIPTION	50mm thick sliding aluminium casement window in black coating. framed inside tinted tempered glass with upper transom	50mm thick fixed aluminium casement window in black coating. framed inside tinted tempered glass(8mm).	50mm thick sliding aluminium casement window in black coating. framed inside tinted tempered glass(8mm) with top transom	50mm thick fixed aluminium casement window in black coating. framed inside tinted tempered glass(8mm) with top transom	50mm thick fixed aluminium casement window in black coating. framed inside tinted tempered glass(8mm) with top transom	50mm thick fixed aluminium casement window in black coating. framed inside tinted tempered glass(8mm) with top transom
COUNT	1	5	4	2	3	3

WINDOW SCHEDULE
SCALE 1:75

N

NO	NOTES
	1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions. 2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course. 3. All reinforced concrete work is to be in accordance with structural engineer's details. 4. All sanitary work to be in accordance with M.O.H rules and regulations. 5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete. 6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside. 7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail. 8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors. 9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant. 10. All internal plaster to be two coats steel float finished. 11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed. 12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown. 13. All painting to be 3 coats. 14. Splash apron of 1000mm along the perimeter of building. 15. Samples of fittings, materials etc. to be produced & approved before commencing work. 16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings. 17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint. 18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan. 19.These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications. Any discrepancy shall be reported immediately to the Architect. 20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications. Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104

Structural Engineer


Mechanical and Electrical Engineer

Drawn By

BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA KAMPALA[UG]
Mobile: +256 709515253

Date	Scale	Checked :
JAN: 2025	AS INDICATED	

Project No.	Drawing No.	Revision
P0	02	

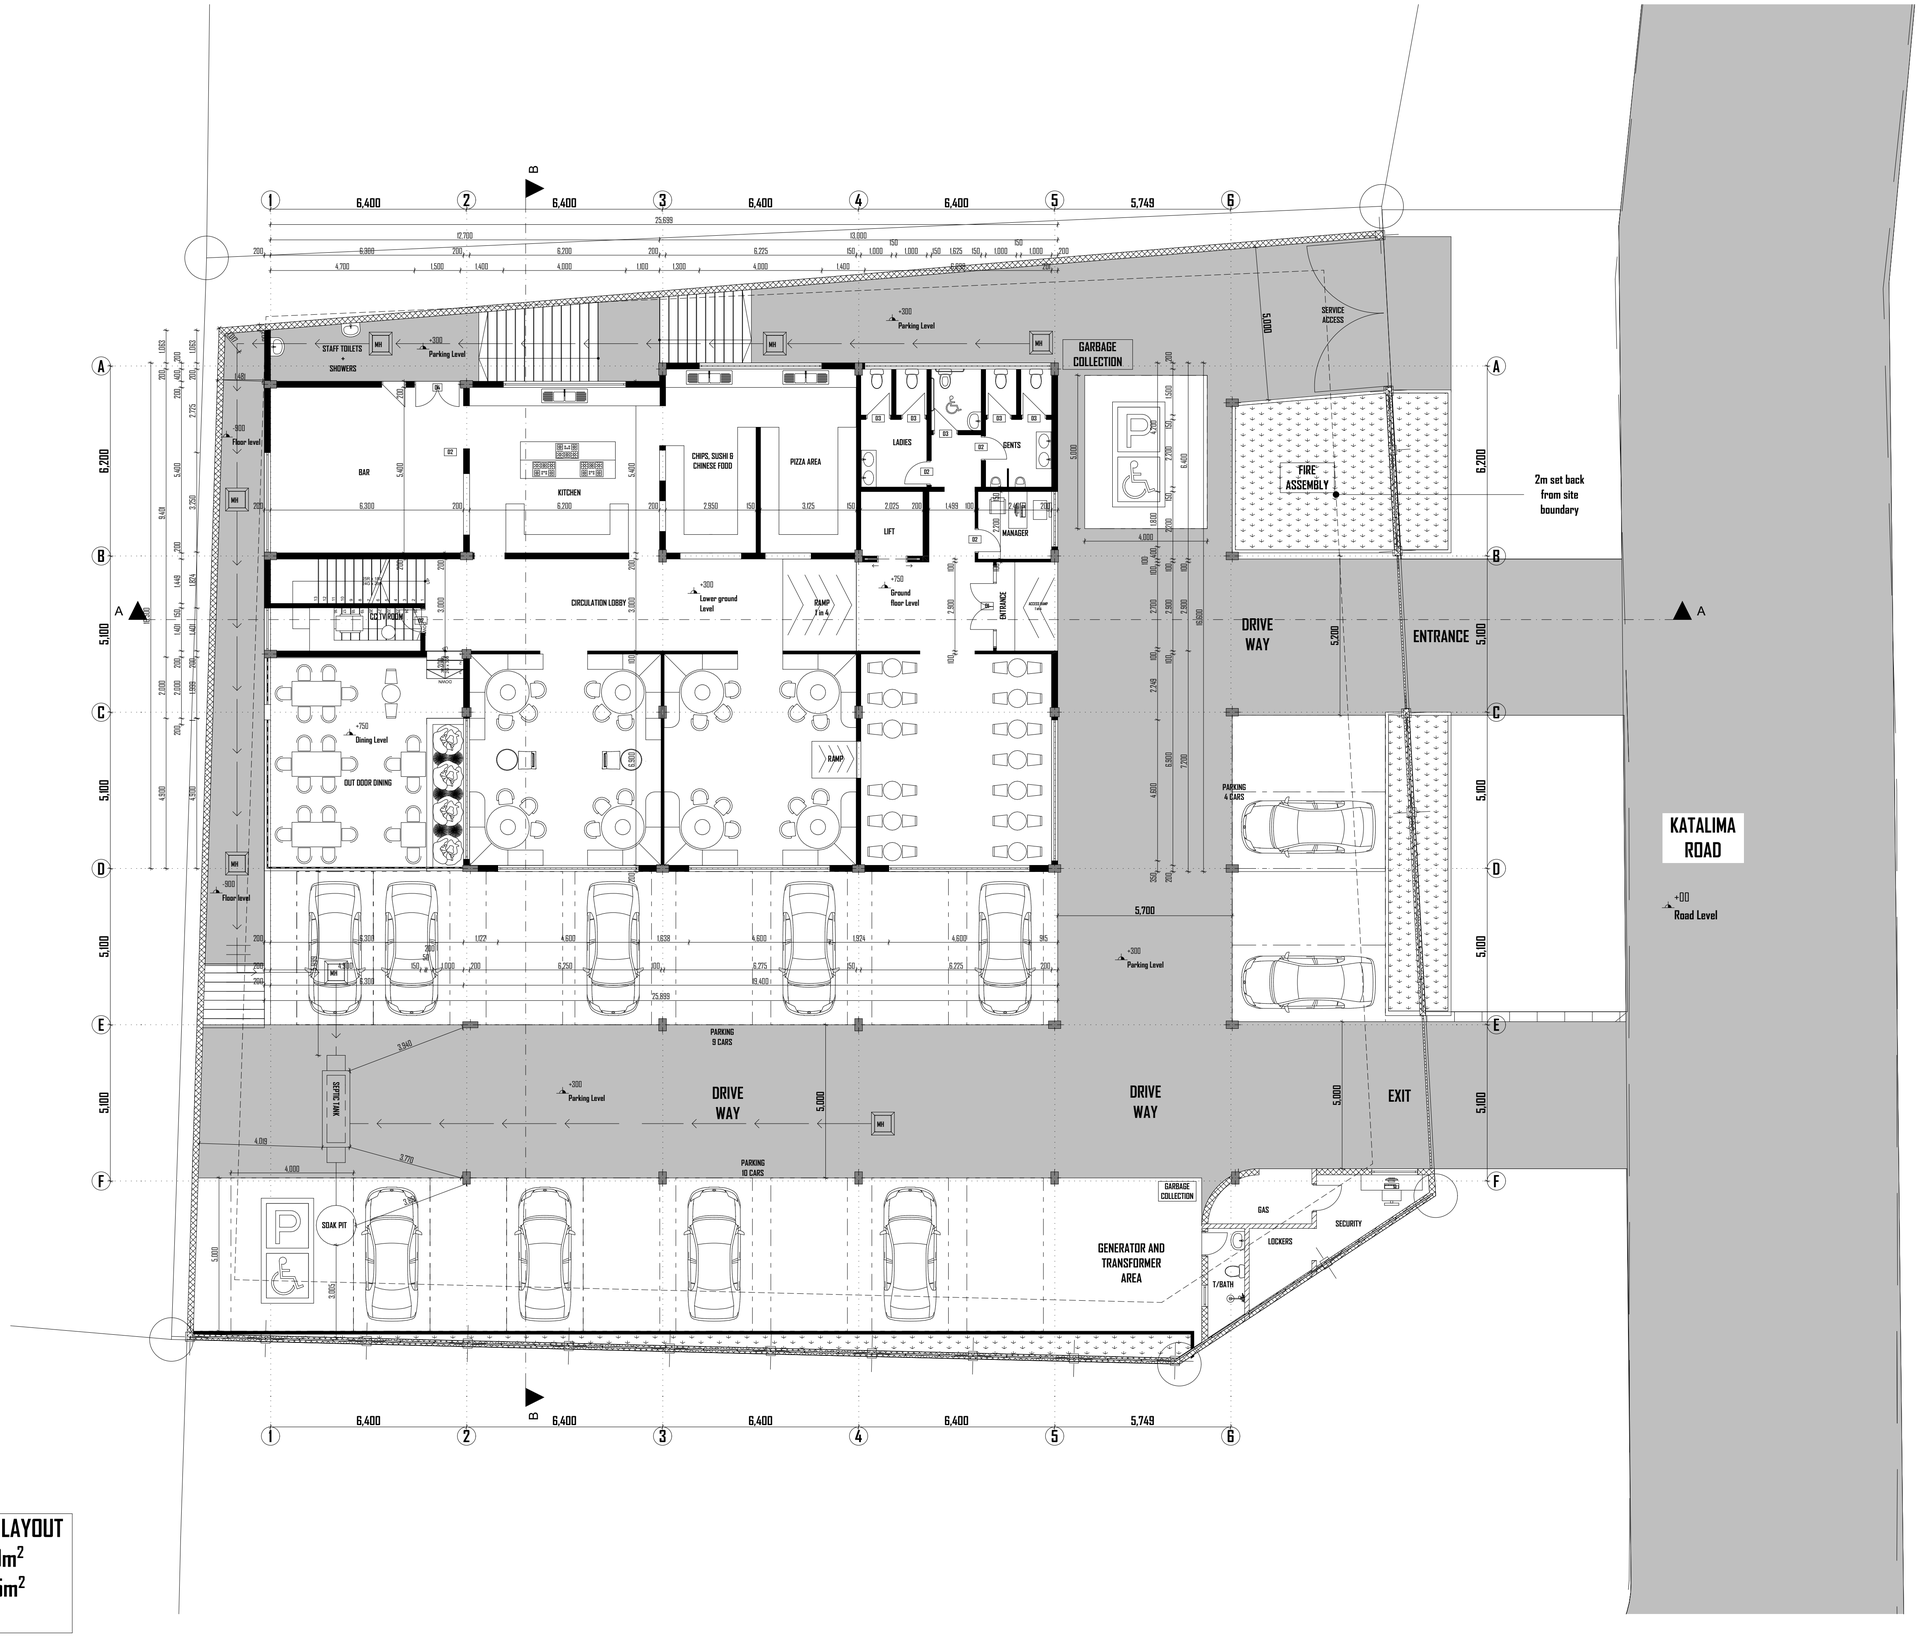

GROUND FLOOR LAYOUT
SITE AREA 1440m²
SLAB AREA 405m²
SCALE 1:100

N

NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.

2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.

3. All reinforced concrete work is to be in accordance with structural engineer's details.

4. All sanitary work to be in accordance with M.O.H rules and regulations.

5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.

6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.

7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.

8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.

9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.

10. All internal plaster to be two coats steel float finished.

11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.

12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.

13. All painting to be 3 coats.

14. Splash apron of 1000mm along the perimeter of building.

15. Samples of fittings, materials etc. to be produced & approved before commencing work.

16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.

17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.

18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.

19.These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications.
Any discrepancy shall be reported immediately to the Architect.

20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications.
Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104

Structural Engineer


Mechanical and Electrical Engineer

Drawn By


BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA
KAMPALA[UG]
Mobile: +256 709515253

Date	Scale	Checked :
JAN: 2025	AS INDICATED	


Project No.	Drawing No.	Revision
P0	03	

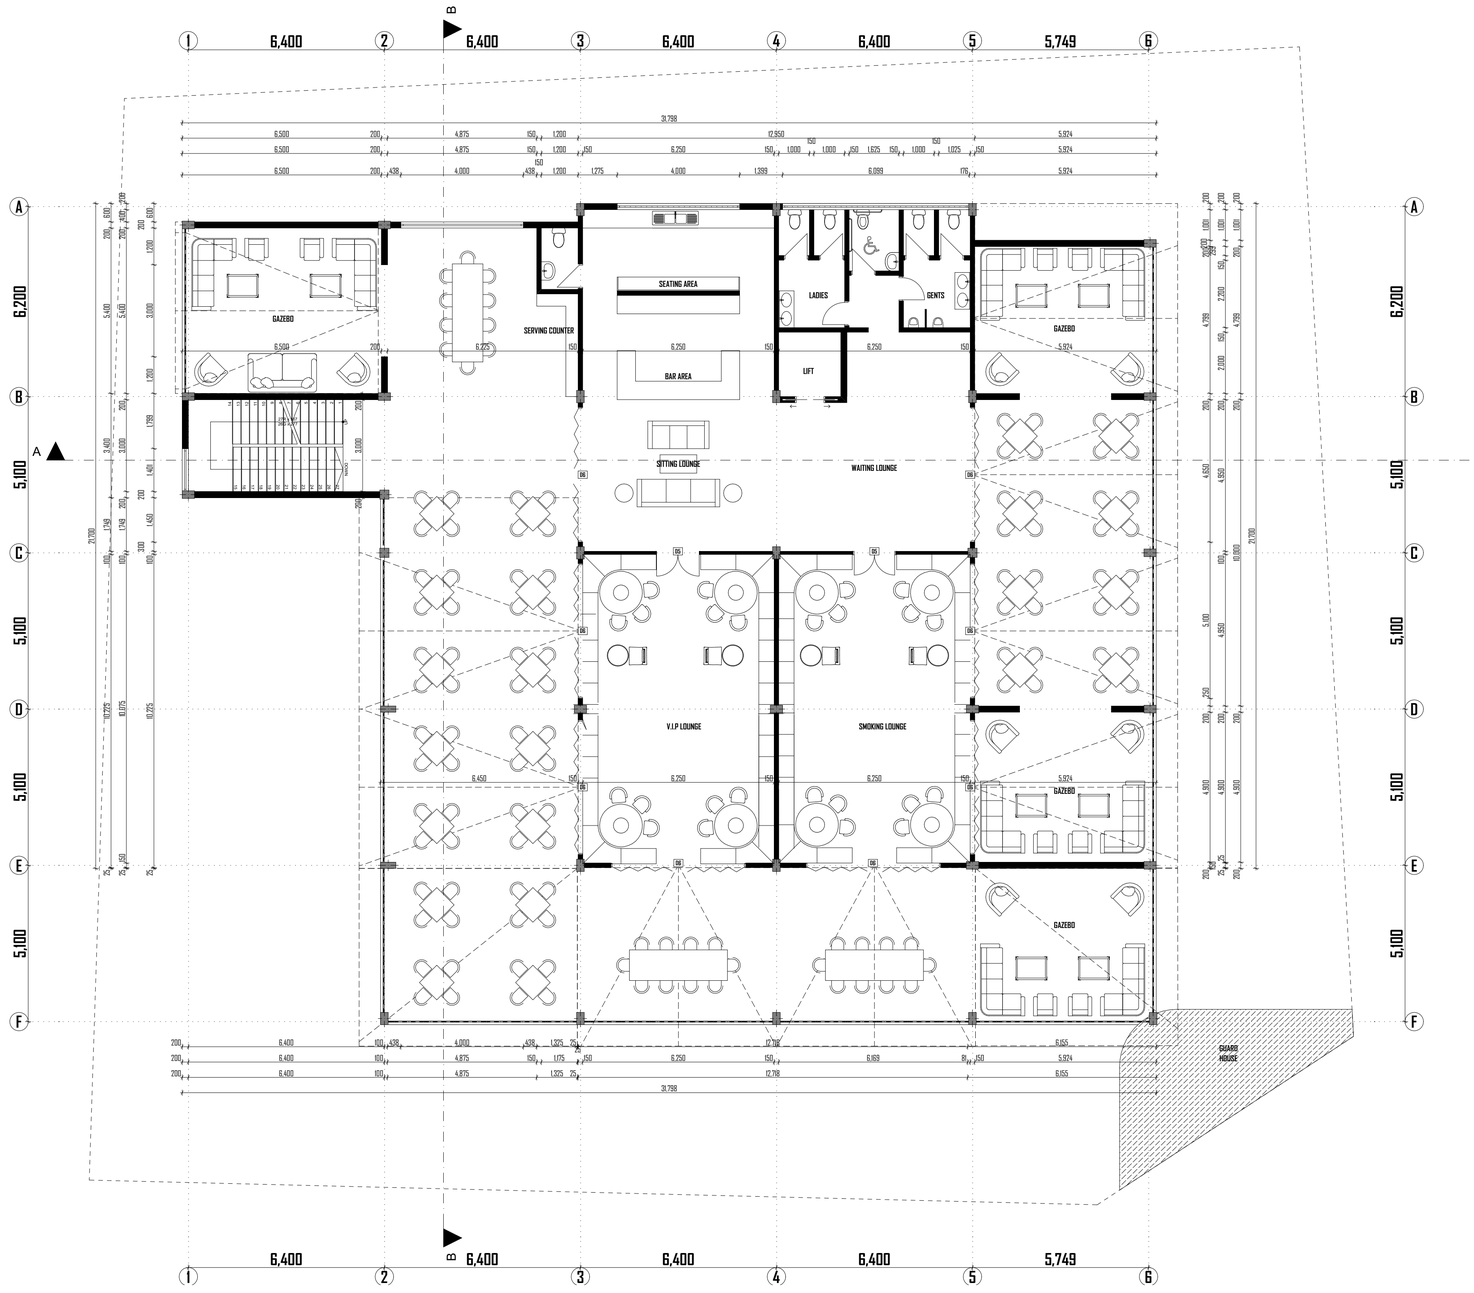


FIRST FLOOR LAYOUT
SLAB AREA 720m²
SCALE 1:100

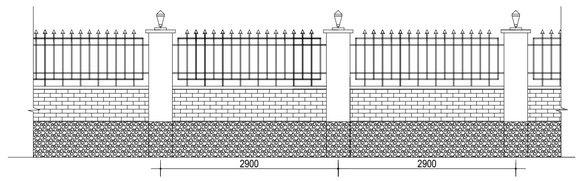

BOUNDARY WALL ELEVATION
SCALE 1:100



BOUNDARY WALL PLAN
SCALE 1:100



BOUNDARY WALL SECTION
SCALE 1:50

BOUNDARY WALL DETAILS
SCALE 1:50

N

NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.
2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.
3. All reinforced concrete work is to be in accordance with structural engineer's details.
4. All sanitary work to be in accordance with M.O.H rules and regulations.
5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.
6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.
7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.
8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.
9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.
10. All internal plaster to be two coats steel float finished.
11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.
12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.
13. All painting to be 3 coats.
14. Splash apron of 1000mm along the perimeter of building.
15. Samples of fittings, materials etc. to be produced & approved before commencing work.
16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.
17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.
18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.
19. These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications. Any discrepancy shall be reported immediately to the Architect.
20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications. Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104


Structural Engineer

Mechanical and Electrical Engineer


Drawn By

BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA
KAMPALA[UG]
Mobile: +256 709515253

Date	Scale	Checked :
JAN: 2025	AS INDICATED	
Project No.	Drawing No.	Revision
P0	04	

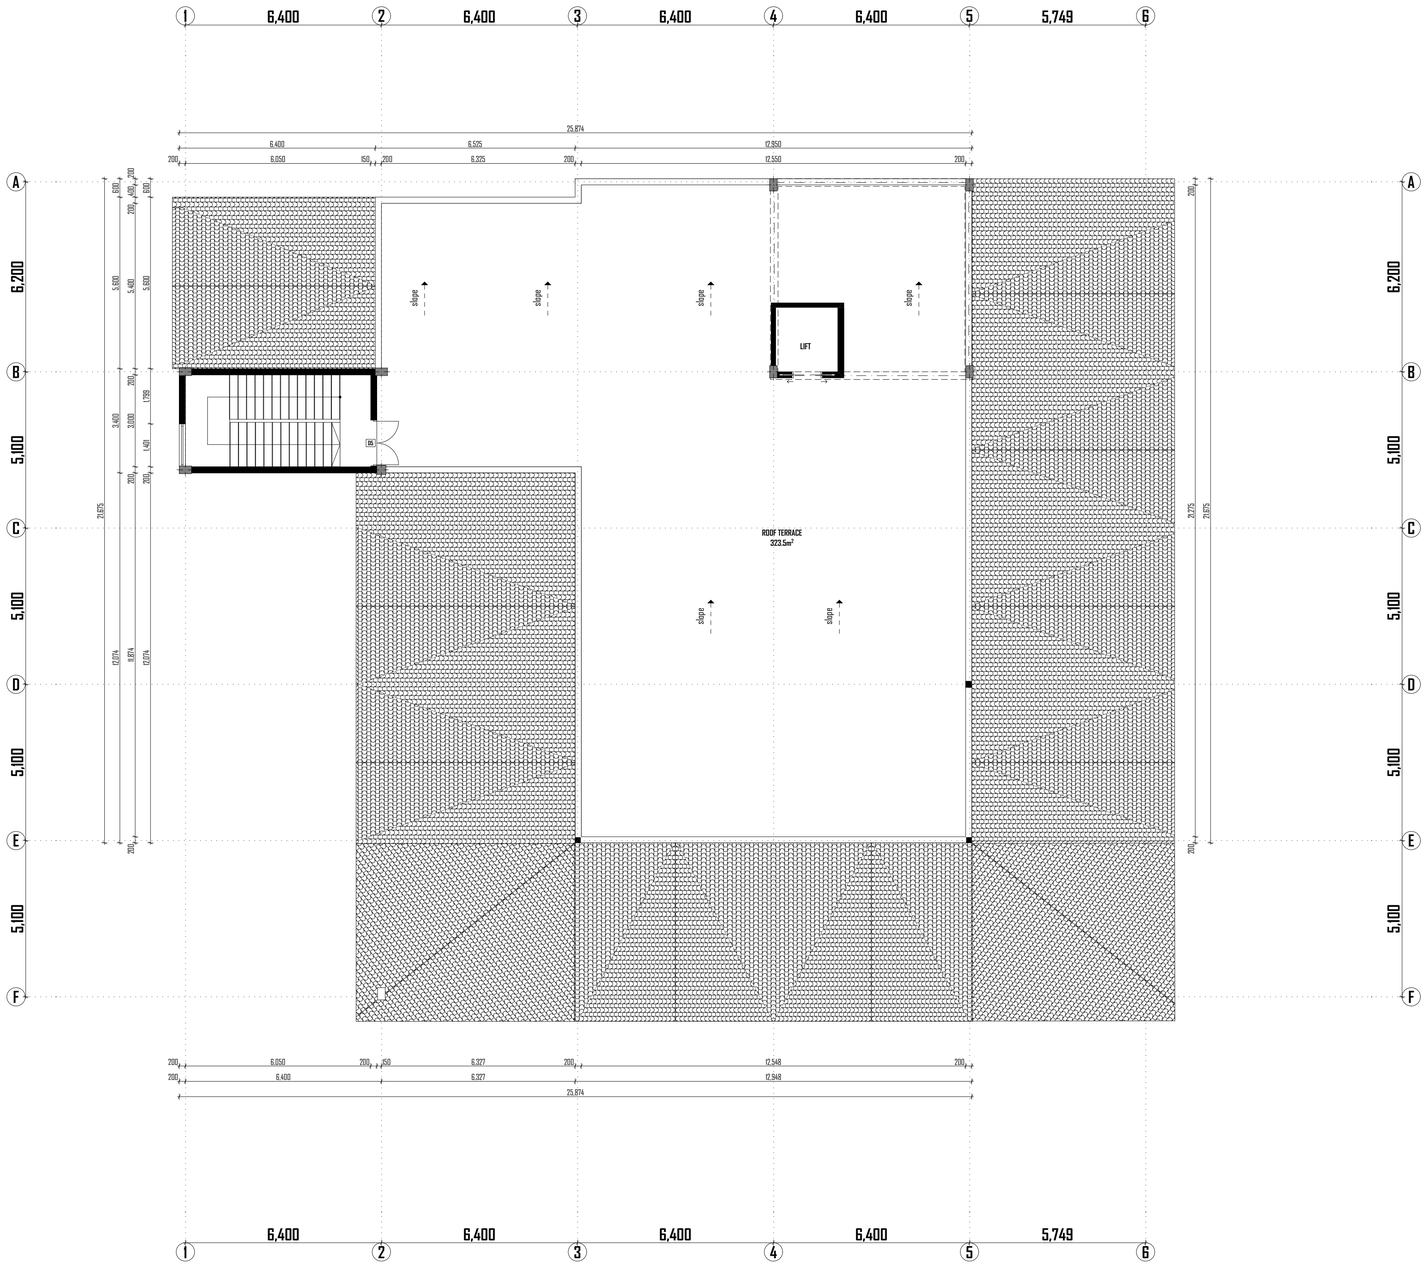

ROOF TERRACE
SLAB AREA 340m²
SCALE 1:100

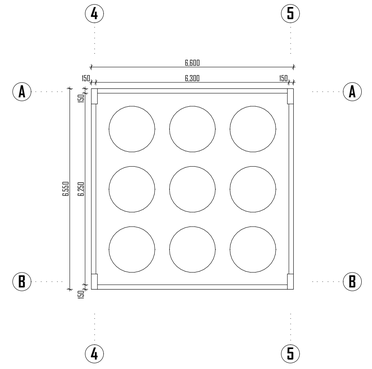

TANK SLAB
SLAB AREA 43m²
SCALE 1:100

N

NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.
2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.
3. All reinforced concrete work is to be in accordance with structural engineer's details.
4. All sanitary work to be in accordance with M.O.H rules and regulations.
5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.
6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.
7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.
8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.
9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.
10. All internal plaster to be two coats steel float finished.
11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.
12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.
13. All painting to be 3 coats.
14. Splash apron of 1000mm along the perimeter of building.
15. Samples of fittings, materials etc. to be produced & approved before commencing work.
16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.
17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.
18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.
19. These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications.
Any discrepancy shall be reported immediately to the Architect.
20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications.
Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWADIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 0752608005 7
ARB No. 157. PC No. 23104

Structural Engineer

Mechanical and Electrical Engineer


Drawn By

BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA
KAMPALA[UG]
Mobile: +256 709515253


Date	Scale	Checked :
JAN: 2025	AS INDICATED	
Project No.	Drawing No.	Revision
P0	05	



EAST ELEVATION
SCALE 1:100

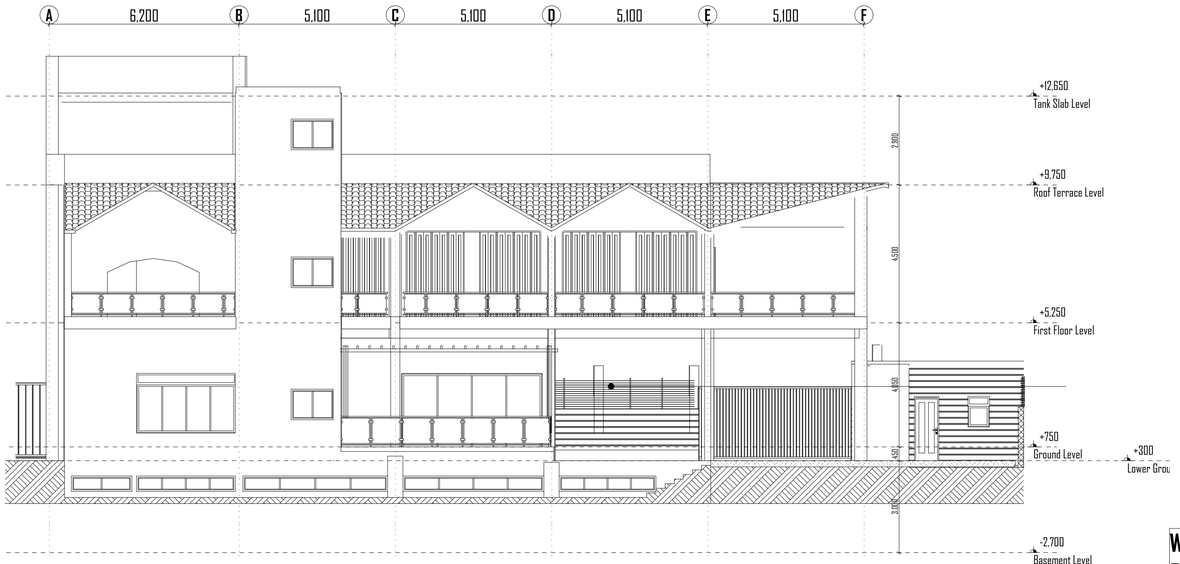

WEST ELEVATION
SCALE 1:100

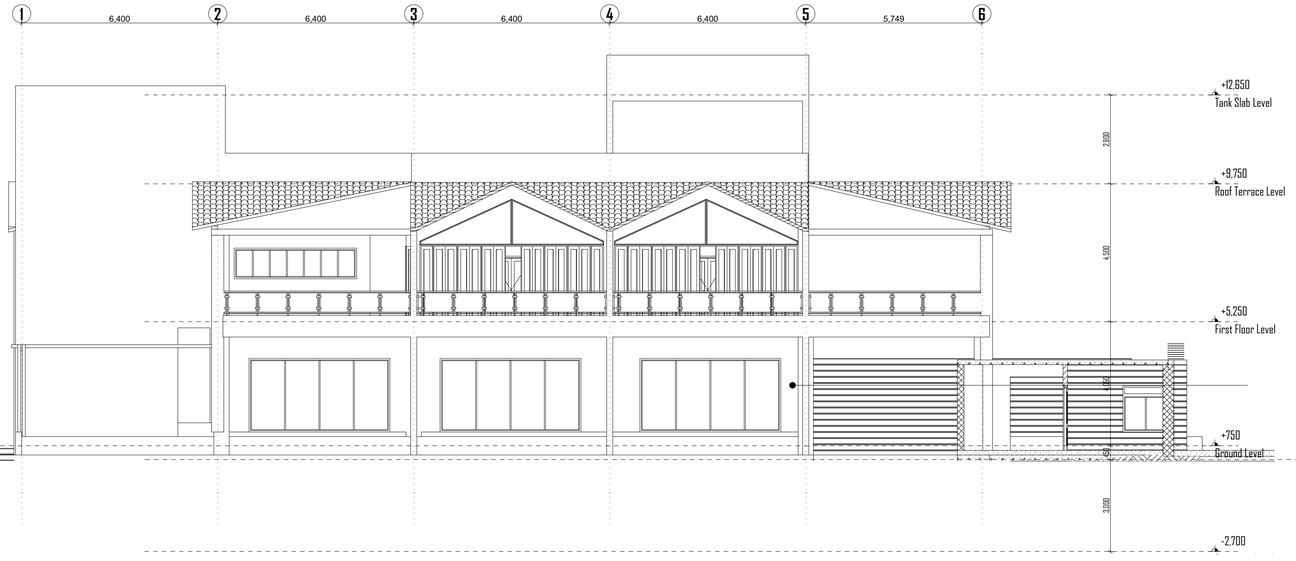

SOUTH ELEVATION
SCALE 1:100

SEPTIC TANK DETAILS

No. OF USERS	L(mm)	B(mm)	D(mm)	CAPACITY(LTRS)	PERCOLATION TRENCHE LENGTHS
6	1800	675	900	1112.5	7.5m
10	2250	675	900	1417.5	12.2m
15	2500	675	900	1561.5	14.4m
20	2800	675	900	1800.0	18.3m
25	3300	675	900	2083.5	30.5m
30	2500	900	1050	2358.0	36.6m
35	2550	900	1050	2502.0	42.6m
40	3000	900	1050	2847.5	
45	3300	900	1050	3240.0	54.8m
50	3600	900		3685.5	60.0m
60	3150	1200	1200	4419.0	66.0m
70	3750	1200	1200	5265.0	73.0m
80	4250	1200	1200	6895.0	79.2m
90	4720	1200	1200	6525.0	85.2m
100	5300	1200	1200	7416.0	91.0m

1- SEPTIC TANK TO BE OF THE APPROPRIATE SIZES AS PER TABLE, BUILT IN BRICK/BLOCK WORK IN 1:3 CEMENT MORTAR WITH 125mm th.
CONC. FOUNDATION MIX 1:3:6 WHERE DEPTH EXCEEDS 1500mm ,RENDE INTERNALLY TO SIDES,BOTTOM WITH 1:3 CEMENT MORTAR 12mm TH WITH STEEL TROWEL FINISH.


2- IN-LET & OUTLET PIPES TO BE 100mm DIA. CASTIRON PIPES TO BS 437 & SECURED TO WALLS BY GALVANISED IRON BRACKETS TARRED & SANDED & BUILT INTO BRICK WORK.

3- 100mm DIA CAST IRON DRAIN PIPE FROM SEPTIC TANK TO EFFLUENT CHAMBER TO BE LAID TO MAIN FALL 1-40.


4- PROVIDE 100mm DIA. HALF ROUND SALT GLAZED -WARE Y-JUCTION CHANNEL TO EFFLUENT CHAMBER PROPERLY BENCHED AS TO PREVIOUSLY DESCRIBED WITH C.I CHANNEL STOP SECURED WITH 12mm LINK GALVANISED CHAIN ONE END FIXED 150mm BELOW COVER SLAB.

5- PERCOLATION TRENCHES TO BE AS SHOWN & LENGTH TO BE AS PERTABLE ,DEPTH OF TRENCH TO BE 450mm DEEPER THAN INVERT OF 100mm
DIA. AGRICULTURAL PIPES LAID TO 1:100 MAIN FALL WITH OPEN JOINT ON 150mm DOWN TO 30mm STONE CAREFULLY SORROUNDED PIPES TO A HEIGHT OF 300mm ABOVE PIPE INVERT LEVEL WITH SIMILAR STONE ,COVERED WITH ROOFING FELT AS DIRECTED & FILLING IN REMINDER OF TRENCHE TO GROUND LEVEL WITH SELECTED FILL MATERIAL.


6- ALL MANHOLES, R.C SLABS TO PROJECT ATLEAST 50mm ABOVE GROUND LEVEL TO CATER FOR INCREASE OF STORM WATER.



SECTION Y-Y

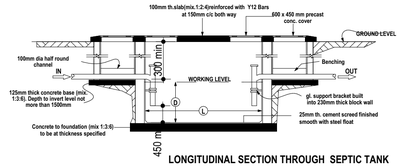


LONGITUDINAL SECTION THROUGH SEPTIC TANK

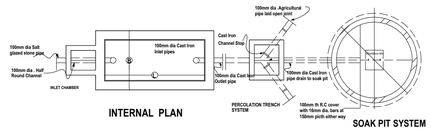


INTERNAL PLAN

SOAK PIT SYSTEM


SEPTIC TANK SETAILS (NTS)

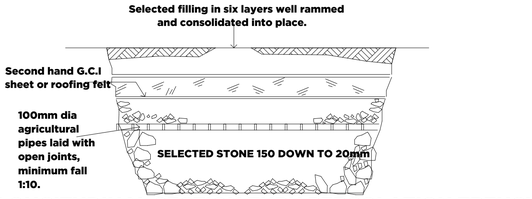

LONGITUDINAL SECTION THRU PERCOLATION TRENCH

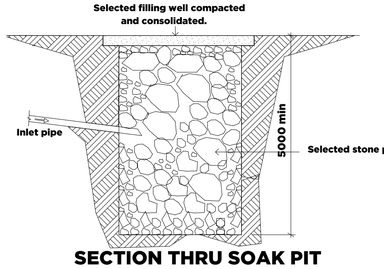

SECTION THRU SOAK PIT



SOAK PIT PLAN

SOAK PIT AND PERCOLATION TRENCH DETAILS (NTS)



NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.

2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.

3. All reinforced concrete work is to be in accordance with structural engineer's details.

4. All sanitary work to be in accordance with M.O.H rules and regulations.

5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.

6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.

7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.

8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.

9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.

10. All internal plaster to be two coats steel float finished.

11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.

12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.

13. All painting to be 3 coats.

14. Splash apron of 1000mm along the perimeter of building.

15. Samples of fittings, materials etc. to be produced & approved before commencing work.

16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.

17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.

18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.

19.These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications.
Any discrepancy shall be reported immediately to the Architect.

20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications.
Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104

Structural Engineer

Mechanical and Electrical Engineer


Drawn By

BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA
KAMPALA[UG]
Mobile: +256 709515253

Date	Scale	Checked :
JAN: 2025	AS INDICATED	
Project No. P0	Drawing No. 06	Revision



NORTH ELEVATION
SCALE 1:100

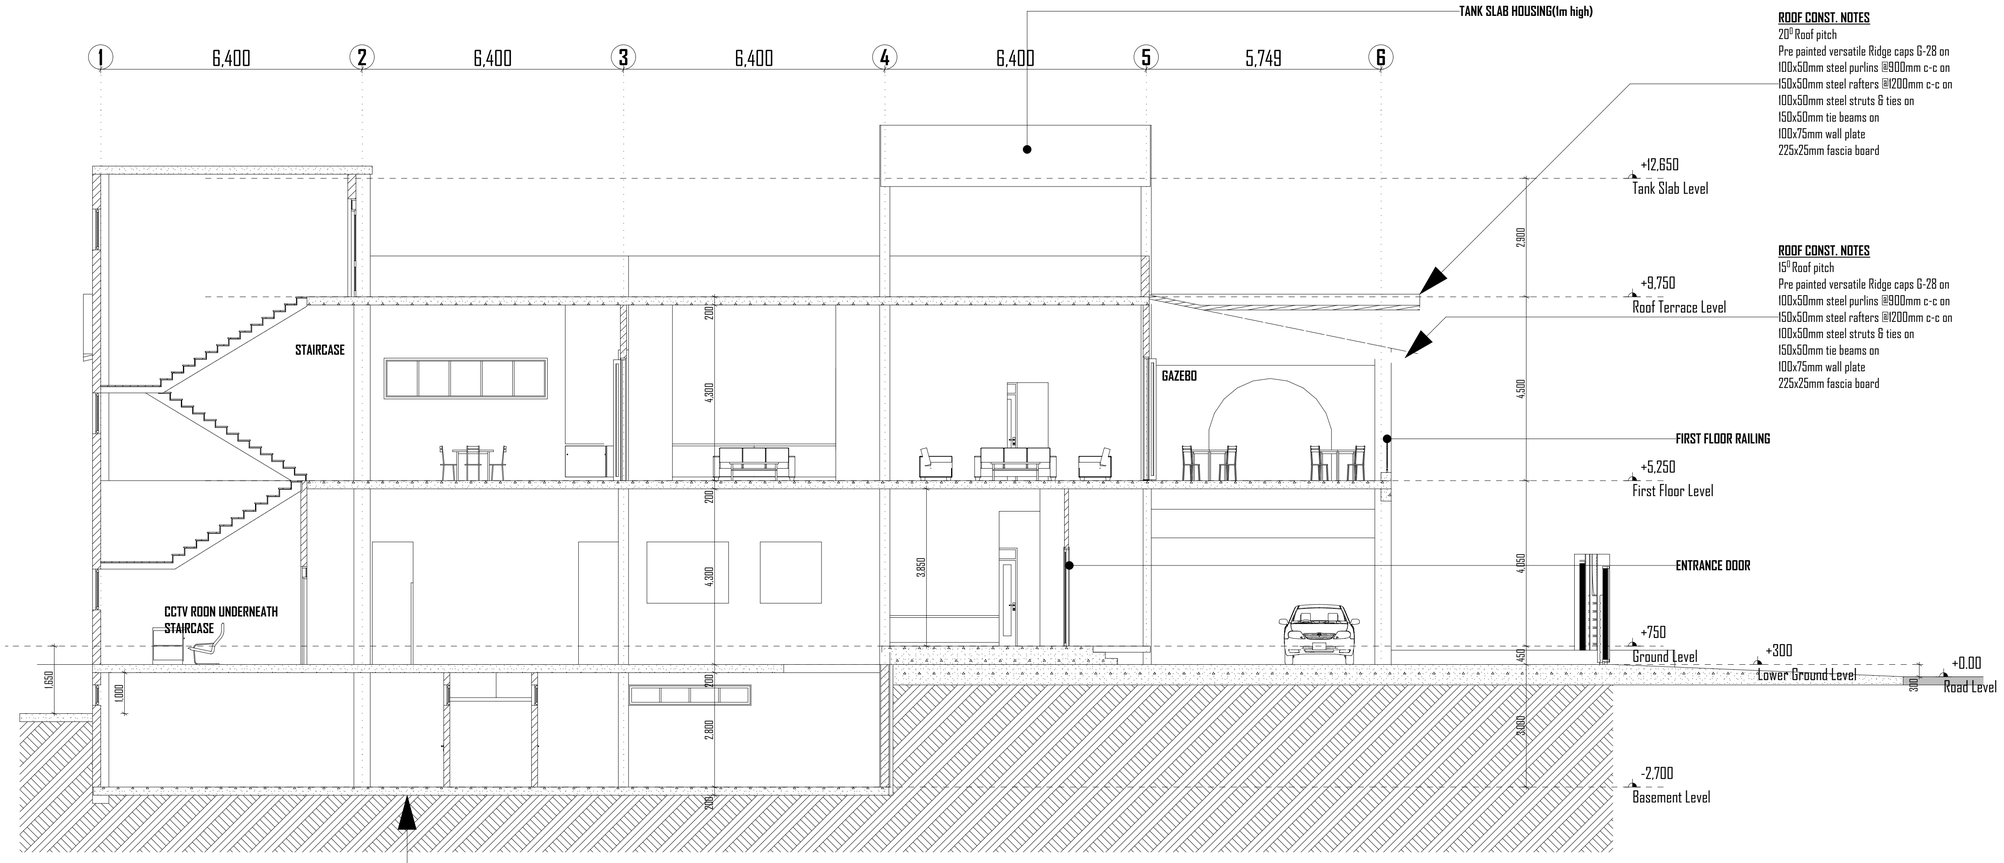

CROSS SECTION A-A
SCALE 1:75

ROOF CONST. NOTES
20° Roof pitch
Pre painted versatile Ridge caps G-28 on
100x50mm steel purlins @900mm c-c on
150x50mm steel rafters @1200mm c-c on
100x50mm steel struts & ties on
150x50mm tie beams on
100x75mm wall plate
225x25mm fascia board

ROOF CONST. NOTES
15° Roof pitch
Pre painted versatile Ridge caps G-28 on
100x50mm steel purlins @900mm c-c on
150x50mm steel rafters @1200mm c-c on
100x50mm steel struts & ties on
150x50mm tie beams on
100x75mm wall plate
225x25mm fascia board

FOUNDATION NOTES
Non slip ceramic floor tiles fixed with adhesives on
150mm concrete bed(mix 1:3:6) reinforced with a BRC 142 mesh on
1000 gauge polythene sheeting on
well compacted murram filling on
200mm Hardcore,
230mm plinth wall on 600x200 foundation core footing
**Depth of foundation to be determined

N

NO	NOTES

1. All dimensions to be checked on site, written dimensions to be followed in preference to scaled dimensions.

2. All walls less than 200mm thick to be reinforced with hoop iron at every alternate course.

3. All reinforced concrete work is to be in accordance with structural engineer's details.

4. All sanitary work to be in accordance with M.O.H rules and regulations.

5. Where drain passes under building or driveway area, pipe to be of cast iron or encased in 150mm concrete.

6. All waste pipes and soil pipes are to be in ducts and the bends to have all cleaning eyes accessible from outside.

7. All windows and external glazed doors on ground floor to have burglar proofing to Architect's detail.

8. All door frames to be rebated & moulded & be full width of wall with moulded architrave to detail, provide rubber door stops to all doors.

9. Stair case and lobby doors to be self closing and 1/2 hour fire resistant.

10. All internal plaster to be two coats steel float finished.

11. All manholes within building area, driveway and parking to have heavy duty air tight covers and double sealed.

12. Provide G.I. 125 x 100 rainwater down pipes and 125 x 100 G.I.box gutter with brackets etc. where shown.

13. All painting to be 3 coats.

14. Splash apron of 1000mm along the perimeter of building.

15. Samples of fittings, materials etc. to be produced & approved before commencing work.

16. All windows to have P.C. cills, built in reinforced concrete Pelmet boxes & timber internal window cills & Skirtings.

17. Steel trusses/portal frames & purlins to be painted with 2 coats of oil paint.

18. Fire fighting equipment to be provided and installed by Building Fire Consultants where shown on plan.

19.These architectural drawings shall be read in conjunction with the Structural drawings,Electrical-Mechanical drawings Bills of Quantities & Technical Specifications.
Any discrepancy shall be reported immediately to the Architect.

20. The Architect shall not accept any liability for works which he has not been expressly instructed to Supervise in writing and has accepted to proceed in writing, or for any ommissions or deviations from his drawings/technical specifications.
Nor shall he take responsibility for works handled by other nominated Consultants or Contractors.

REVISIONS

NO	date	description

Project

PROPOSED COMERCIAL BUILDING TO BE BUILT ON PLOT 63, KATALIMA ROAD, NAGURU, NAKAWA DIVISION , KAMPALA CAPITAL CITY AUTHORITY

Client **MR. KESHVALA RANJIT KUMAR SIDIBHAI**

Client's Signature:.....

Work stage

Submission to Kampala Capital City Authority

Drawing Title

SITE LOCATION, BLOCK AND SITE PLAN, FLOOR PLANS, SECTIONS, ELEVATIONS, DOOR &WINDOW SCHEDULES, DRAINAGE AND BOUNDARY WALL DETAILS,

CONSULTANT

AMKEN & ASSOCIATES
P.O BOX, 28086, KAMPALA
amken10@gmail.com
Mobile: 07526080057
ARB No. 157. PC No. 23104

Structural Engineer

Mechanical and Electrical Engineer

Drawn By

BATUL SABUNWALA
PLOT1054 MATOVU LANE, MUYENGA-BUKASA KAMPALA[UG]
Mobile: +256 709515253

Date	Scale	Checked :
JAN: 2025	AS INDICATED	
Project No.	Drawing No.	Revision
P0	07	